

JUNG

Chrome

A CLASSIC WITH A NEW SHINE




Chrome

CHROME – THE HIGHLIGHT OF SOPHISTICATED HOME DÉCOR

A sophisticated ambience thrives on extraordinary effects. Metal is therefore one of the preferred materials which emphasise special features in exposed positions in houses and apartments.


With the new chrome design variant from the classic LS range, there is now an attractive alternative which achieves a striking effect. This aura is clearly emphasised by the conflict between the strict, square geometry of the switch design and the high-gloss surface finish. To achieve this exclusive visual effect, the basic metal switch is given a resistant chrome plating during the galvanising process which captivates due to its brilliant shine.




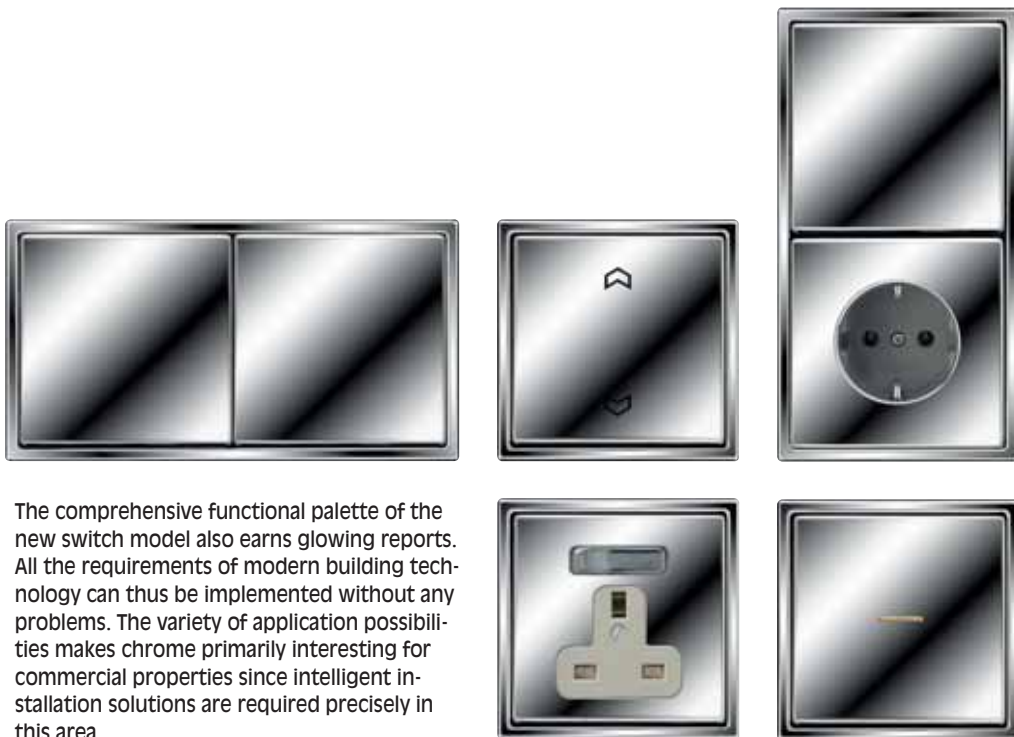


The comprehensive functional palette of the new switch model also earns glowing reports. All the requirements of modern building technology can thus be implemented without any problems. The variety of application possibilities makes chrome primarily interesting for commercial properties since intelligent installation solutions are required precisely in this area.

Chrome

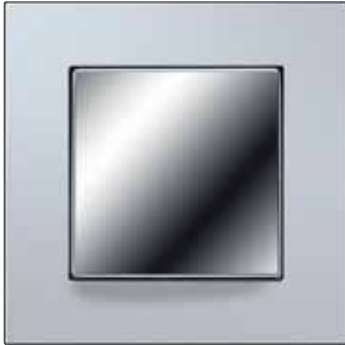

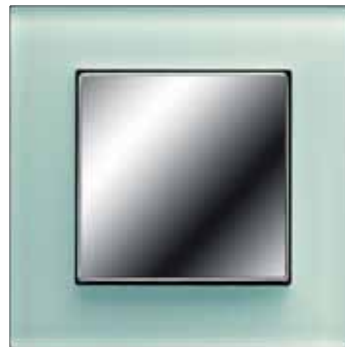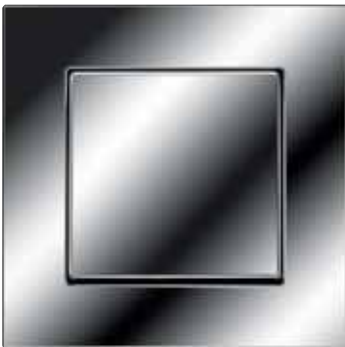




























MAKE COMBINATIONS ACCORDING TO YOUR MOOD



The new chrome design is the perfect addition to the versatile LS range. The individual components from the different LS ranges can be assembled together in multifaceted ways. Materials and décors can be selected in increasingly new combinations to match the ambience. There are attractive frame variants in chrome, satin-coated glass, aluminium, stainless steel and various stone effects which can be fitted with the inserts of the LS 990, aluminium and stainless steel ranges in a variety of combinations. As a contemporary new design, chrome certainly catches the eye with its delightful mix of materials and effects: this pièce de résistance has the unique and high-quality feel of a handmade object in any version.



























Overview of available devices


* with sealing gasket ref.-no. 551 WU the protection level IP 44 is ensured.

	Rocker for 1-gang switch and push-button inserts GCR 2990*		SCHUKO-sockets 10 – 16 A / 250 V, with child protection GCR 2520 KI
	Rocker for 1-gang switch and push-button inserts with inscription plate 12 x 55 mm GCR 2990 NA*		SCHUKO-sockets 10 – 16 A / 250 V, with inscription plate 12 x 55 mm and child protection GCR 2520 KINA
	Rocker with diffused light outlet for 1-gang switch and push-button inserts with pilot light GCR 2990 KO2		SCHUKO-sockets 10 – 16 A / 250 V, with hinged lid GCR 2520 KL*
	Rocker with transparent lens for 1-gang switch and push-button inserts GCR 2990 KO5*		SCHUKO-sockets 10 – 16 A / 250 V, with hinged lid and inscription plate 12 x 55 mm GCR 2520 NAKL*
	Rocker with transparent lens for 1-gang switch with inscription plate 12 x 55 mm GCR 2990 NAKO5*		SCHUKO-sockets 10 – 16 A / 250 V, with hinged lid and child protection GCR 2520 KLK1*
	Rocker for 1-gang switch and push-button inserts with symbol "light" GCR 2990 L*		Socket outlet 2-pole + earth, 13 A / 250 V, British system with child protection and screw connection terminals GCR 2521 BS
	Rocker for 1-gang switch and push-button inserts with symbol "bell" GCR 2990 K*		Socket outlet 2-pole + earth, 13 A / 250 V, British system with switch, child protection and screw connection terminals without pilot light GCR 2172
	Rocker for 1-gang switch and push-button inserts with symbol "door" GCR 2990 T*		Socket outlet 2-pole + earth pin, 10 – 16 A / 250 V, French / Belgian system screwless connection GCR 2520 F
	Rocker for 2-gang switch and push-button inserts GCR 2995*		Socket outlet 2-pole + earth pin, 10 – 16 A / 250 V, French / Belgian system screw terminals GCR 2521 F
	Rocker with 2 transparent lenses for 2-gang switch inserts 505 KOU 5, 505 KOVU 5 GCR 2995 KO5*		with child protection screwless connection GCR 2520 FKI
	Rocker for 2-gang switch and venetian blind switch inserts GCR 2995 P*		with child protection screw terminals GCR 2521 FKI
	Center plate for key switch/key push-button inserts GCR 2928*		with inscription plate 12 x 55 mm screwless connection GCR 2520 FKI NA
	Center plate with knob for rotary, time delay and venetian blind switch/push-button inserts GCR 2941*		with screwless connection and child protection screw terminals GCR 2521 FKI NA
			Center plate with knob for rotary dimmer and potentiometer inserts GCR 2940*
			Center plate with knob for speed regulator insert GCR 2940.20*
			Standard center plate for touch dimmer and electronic switch inserts GCR 1561.07


Overview of available devices

* with sealing gasket ref.-no. 551 WU the protection level IP 44 is ensured.


	Radio center plate for touch dimmer and electronic switch inserts GCR 1561.07 F		KNX Info display GCR 2041
	Universal center plate for touch dimmer and electronic switch inserts GCR 1561.07 U		KNX Bluetooth Gateway incl. BCU GCRBG 2041
	Flat radio-controlled wall-mounted transmitter 1 channel GCR 41 F 2 channel GCR 42 F 4 channel GCR 44 F		Automatic switch, lens type 1.10 m standard version GCR 1180
	KNX push-button sensor, 1-gang Universal GCR 2091 NABS Standard GCR 2071 NABS		Automatic switch, lens type 1.10 m universal version GCR 1180-1
	KNX push-button sensor, 2-gang Universal GCR 2092 NABS Standard GCR 2072 NABS		Center plate for motor control inserts with anti lock-out function and with terminal for sensors GCR 5232
	KNX push-button sensor, 4-gang Universal GCR 2094 NABS Standard GCR 2074 NABS		Center plate for motor control inserts with radio controlled receiver GCR 5232 F
	KNX light scene push-button sensor, 8-gang GCR 2094 LZ		Center plate for motor control inserts with timer function standard version GCR 5232 ST
	KNX automatic switch for bus coupling unit 2070 U standard version lens type 1.10 m GCR 3180* lens type 2.20 m GCR 3280*		Center plate for motor control inserts with timer function universal version GCR 5232 T3
	KNX automatic switch for bus coupling unit 2070 U universal version lens type 1.10 m GCR 3180-1 A lens type 2.20 m GCR 3280-1 A		Center plate for motor control inserts with timer function, universal version with terminal for sensors GCR 5232 TS3
	Room temperature sensor with BCU GCR 2178		Center plate for room thermostat insert TR 231 U + TR 241 U GCR TR 231 PL
	Room temperature sensor with BCU and push-button interface GCR 2178 TS		Center plate for room thermostat insert TR 236 U GCR TR 236 PL
	Object temperature sensor with BCU and push-button interface GCR 2178 ORTS		Center plate for floor thermostat insert FTR 231 U GCR FTR 231 PL
			Center plate for 1 BNC- or 1 loudsp. socket GCR 2962-2
			Center plate for 2 BNC- or 2 loudsp. sockets GCR 2962-1



Center plate for
TV/FM sockets GCR 2990 TV




Center plate for
TV/FM/SAT sockets GCR 2990 SAT




Cable outlet
with center plate and insert GCR 2990 A




Center plate for
UAE-sockets
1 x 8 pole GCR 2969-1 UA




Center plate for
UAE-sockets 1 x 8 pole
with inscription plate 12 x 55 mm GCR 2969-1 NAUA



Center plate for
UAE-sockets
2 x 8 pole GCR 2969-2 UA



Center plate for
UAE-sockets 2 x 8 pole
with inscription plate 12 x 55 mm GCR 2969-2 NAUA



Center plate with hinged lid for devices
with plate 50 x 50 mm GCR 2990 KL*
and inscription field GCR 2990 NAKL*



LED pilot light with short decal information
dimension of complete device 71 x 142 mm
version with white LEDs GCR 2539 N71LEDW


version with blue LEDs GCR 2539 N71LEDB

dimension of complete device 71 x 213 mm
version with white LEDs GCR 2539 N142LEDW

version with blue LEDs GCR 2539 N142LEDB




LED pilot light
with white and blue LEDs GCR 2539 LEDWB




LED red/green pilot light
with two light pads GCR 2539-2 LEDRG



LED floor pilot light
with white LEDs GCR 2539-O LEDW
with blue LEDs GCR 2539-O LEDB



SCHUKO-socket 16 A / 250 V ~,
with white LED floor pilot light
and child protection GCR 2520-O LEDW



Frames
for vertical and horizontal installation
chrome





1-gang 81 x 81 mm GCR 2981*

2-gang 81 x 152 mm GCR 2982*

3-gang 81 x 223 mm GCR 2983*

4-gang 81 x 294 mm GCR 2984*

5-gang 81 x 365 mm GCR 2985*

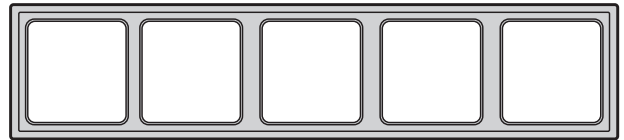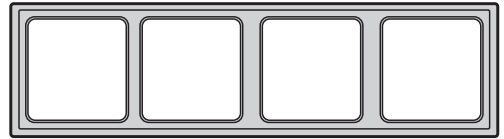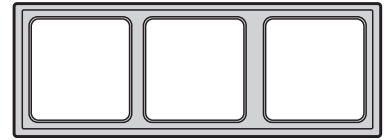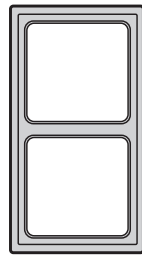

JUNG

P-GB-GCR 0606



ALBRECHT JUNG GMBH & CO. KG
P.O. Box 13 20
D-58569 Schalksmühle

Phone: +49.2355.806-553
Fax: +49.2355.806-254
E-mail: mail.vka@jung.de
Internet: www.jung.de

For sales contacts in your country see:
www.jung-salescontact.com